


Adhered Thin Brick Veneer - Soffit Detail Sloped Roof

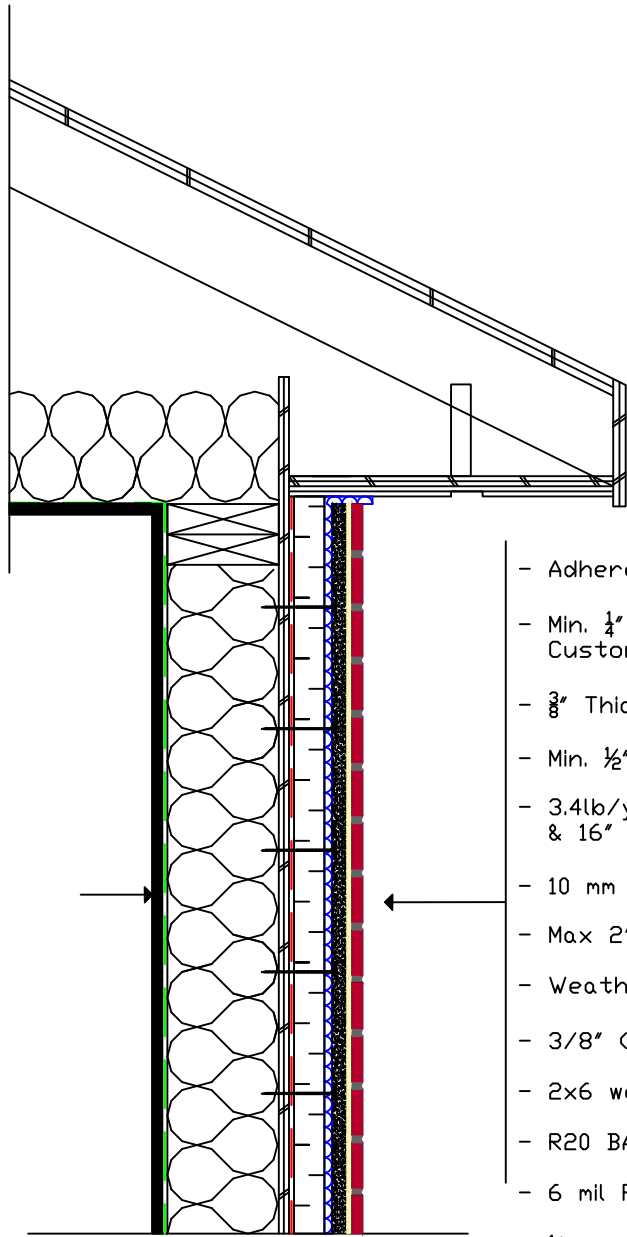

- Adhered thin brick veneer
- Min. $\frac{1}{4}$ " THK. Setting bed mortar (Specmix XP500, Laticrete Hi-bond Masonry veneer mortar Custom Building Products Flexbond or equivalent)
- $\frac{3}{8}$ " Thick joints b/w units jointed with Pre-bagged Type S or Type N mortar
- Min. $\frac{1}{2}$ " THK. scratch coat with Pre-bagged Type S Mortar lightly scored with hand broom
- 3.4lb/yd² Galvanized Diamond Wire Self-furring Lath fastened @ 6" o.c. vertically & 16" o.c. horizontally Min embed 1" into stud.
- 10 mm ($\frac{3}{8}$ ") Drainage Mat (Keane-driwall, DeltaDry or equivalent)
- Max 2" THK. Rigid Insulation
- Weather Resistant Barrier (WRB)
- $\frac{3}{8}$ " (10 mm) OSB or $\frac{1}{2}$ " Plywood Sheathing
- 2x6 wood studs at 16" o.c.
- R20 BATT Insulation
- 6 mil Poly Vapour Barrier
- $\frac{1}{2}$ " Gypsum